

# FLOWMETER SERIES FLUX 0

The flowmeters FLUX 0 series are miniaturized devices used to measure air flow rate. They come complete with push-in pipe fittings. Numerous functions can be viewed and set on a three-colour display. They have 2 digital and one analogue outputs, each of which can be freely set to measure the instantaneous flow rate, the accumulated flow rate or the pressure, therefore they can perform the function of flowmeter, flow switch, pressure gauge or pressure switch.

They feature reduced dimensions, with a width of only 17 mm.

The FLUX 0 flowmeters comes in two models: one for flow rates up to 50 NI/min, the other up to 200 NI/min, and are can be powered at 12 and 24 VDC.



TECHNICAL DATA		FLUX 0 50 L	FLUX 0 200 L
Measured flow range	NI/min	0 - 50	0 - 200
Direction of flow		Unidirectional	
Working pressure range	bar	-0,9 to 8	
	MPa	-0,09 to 0,8	
	psi	-13 to 116	
Maximum admissible pressure	bar	10	
Pipe diameter for push-in fitting	mm	8	
Connecting cable	VDC	12 to 24 ± 10%, ripple max 10%	
Current consumption	mA	≤ 50	
Power cable		Cable Ø 4 length 2 m, oil resistant, 26 AGW (6 x 0,15 mm <sup>2</sup> )	
Weight	g	100 (including cable)	
<b>DISPLAY</b>			
Instant flow rate			
Display range	NI/min	0 - 50	0 - 200
Minimum setting scale	NI/min	0,1	1
	ft <sup>3</sup> /min	1	1
Cumulative flow rate			
Display range		9999999,9	99999999
Minimum setting scale	NI	0,1	1
	ft <sup>3</sup>	1	1
Pressure			
Display range	kPa	-100 to 1000	
Minimum setting scale	kPa	1	
	bar	0,01	
	psi	0,1	
<b>PRECISION</b>			
Flow rate			
Guaranteed measuring range		2 to 100 % FS	
Display accuracy		± 3 % FS ± 1 digit ▲	
Analogue output accuracy		± 5 % FS ▲	
Repeatability		± 1 % FS ± 1 digit ■	
Linearity		± 3 % FS ■	
Temperature characteristic		± 2 % FS for a temperature range of 15-35°C; ± 5 % FS for a temperature range of 0-15°C or 35-50°C ■	
Pressure characteristic		± 5 % FS ± 1 digit *	
Pressure			
Guaranteed measuring range		0 to 100 % FS	
Display accuracy		± 2 % FS ± 1 digit ●	
Analogue output accuracy		± 2,5 % FS ●	
Repeatability		± 0,2 % FS ± 1 digit ●	
Linearity		± 1 % FS ●	
Temperature characteristic		± 2 % FS ●	

▲ Data valid under these conditions: input pressure 3 bar, output pressure 1 bar, temperature 25°C

■ Data valid under these conditions: output pressure 1 bar, temperature 25°C


\* Data valid under these conditions: -90 to 800 kPa, output pressure 1 bar, temperature 25°C

● Data valid under these conditions: flow rate 0 NI/min, temperature 25°C

TECHNICAL DATA	FLUX 0 50 L	FLUX 0 200 L
<b>DIGITAL OUTPUTS</b>		
N ° outputs		2 PNP
Max current	mA	125
Max voltage	VDC	24
Residual voltage	V	≤ 1,5 V
Response time, with flow rate setting	ms	50, 80, 120, 200, 400, 800, 1500 (default 800)
Response time, with pressure setting	ms	2,5, 25, 100, 250, 500, 1000, 1500 (default 2,5)
Response mode, with flow rate setting		Hysteresis mode, window comparison mode, cumulative mode, cumulative pulse mode ♦ Normally open or normally closed
Response mode, with pressure mode setting		One-point setting mode, hysteresis mode, window comparison mode, Normally open or normally closed ♦
Hysteresis		Adjustable
Short-circuit protection at output		Yes
Cumulative pulse output	Nl/impulse	2
	ft <sup>3</sup> /impulse	7
<b>ANALOGUE OUTPUT</b>		
Version with voltage	V	1 to 5, 1 kΩ impedance
Version with current	mA	4 to 20, with ≤ 300 Ω impedance
Response time, with flow rate setting	ms	≤ 100
Response time, with pressure setting	ms	≤ 50
<b>AMBIENT CONDITIONS</b>		
Fluid		Filtered and unlubricated air, inert non-corrosive and non-explosive gas, A 5 μm filter and a 0,01 μm oil purifier are recommended
Degree of protection		IP 40
Temperature range	°C	0 to 50
Storage temperature	°C	0 to 60, but without condensate or ice
Ambient humidity		35 to 85% relative humidity; no condensate
Insulation voltage		1000 VAC for one minute between casing and cable
Resistance of Insulation		Min, 50 MΩ (at 500VDC between casing and cable)
Vibration admitted		1,5 mm amplitude or 10 g with scanning every minute from 10 to 55 Hz at 10 Hz, for 2 hours in each direction x, y and z
Impact		100 m/s <sup>2</sup> (10 g), 3 times in each direction x, y and z
Electromagnetic compatibility (EMC)		IEC 61000-6-2, IEC 61000-6-4

♦ Refer to the user manual for further details


## COMPONENTS

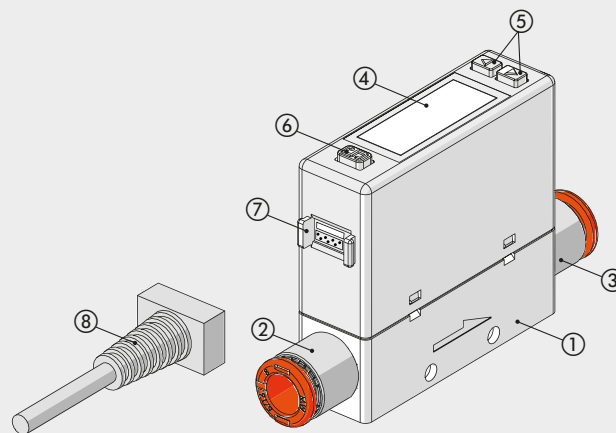



- ① BODY: technopolymer
- ② INPUT AUTOMATIC FITTING: nickel-plated brass and technopolymer
- ③ OUTPUT AUTOMATIC FITTING: nickel-plated brass and technopolymer
- ④ DISPLAY LCD
- ⑤ BUTTON: silicone.  
Used to select the operating mode, ON/FF switching and value setting
- ⑥ BUTTON: silicone.  
Used to select the operating mode and confirm the set values
- ⑦ CONNECTOR
- ⑧ CONNECTOR WITH CABLE: length 2 meters

WIRING DIAGRAMS

Analog voltage output / external input

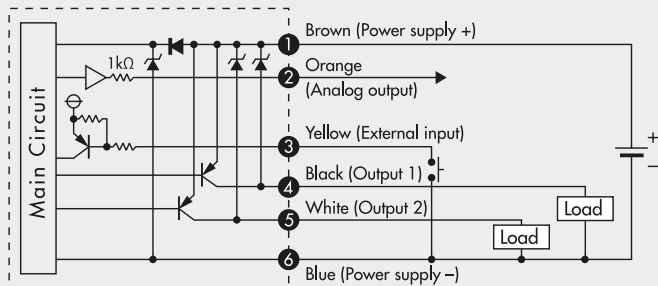


Analog current output / external input

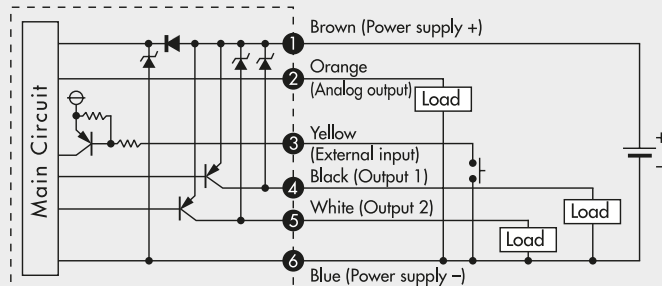

PIN	Cable color	Function
1	Brown	Power supply (12 to 24 VDC)
2	Orange	Analog voltage output: 1 to 5 V Analog current output: 4 to 20 mA
3	Yellow	External input
4	Black	Output 1 (Max. load current: 125 mA)
5	White	Output 2 (Max. load current: 125 mA)
6	Blue	0V (GND)


PNEUMATIC CONNECTION

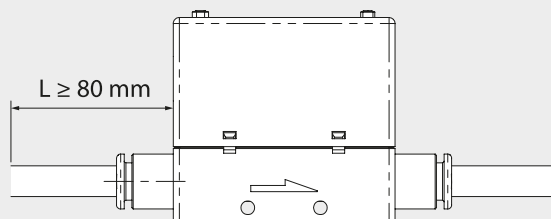


The input pipe must have a straight section of at least 80 mm in length or more, otherwise the measurement will be inaccurate.

NOTES


## FIXING OPTIONS

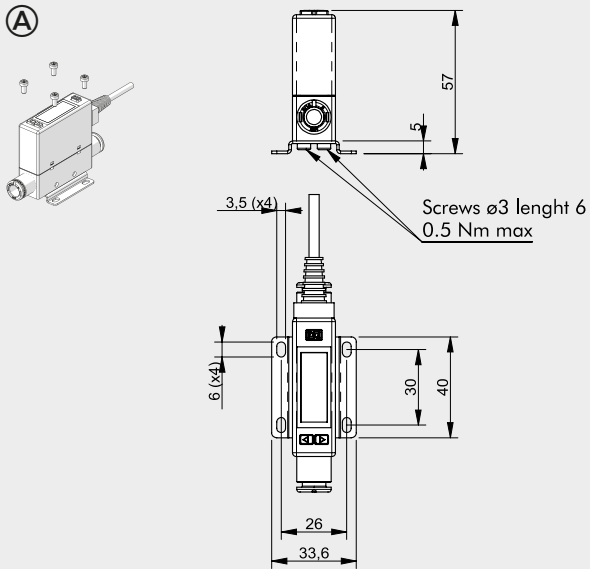


Fixing with bracket code 90009A001 using the included  $\varnothing 3$  self-tapping screws and M3 screws

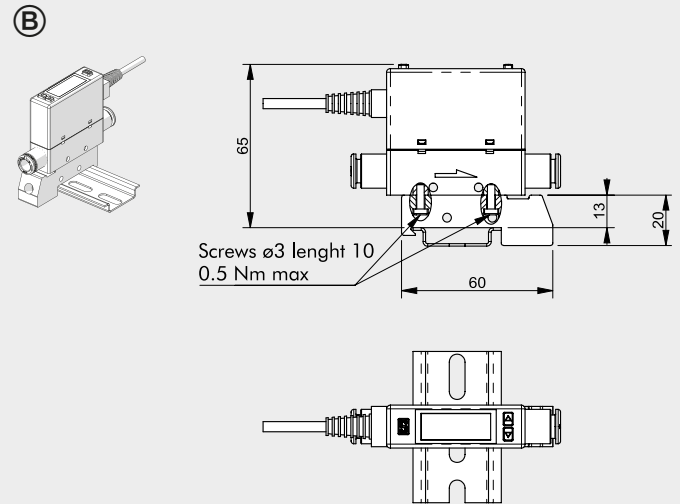

Single fixing on DIN bar with code bracket 90009A002 using the included  $\varnothing 3$  self-tapping screws

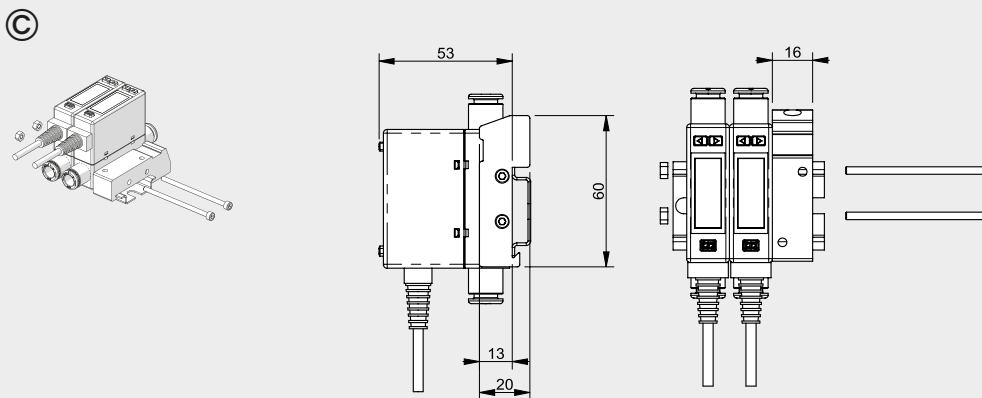


Multiple fixing on DIN bar with code bracket 90009A002 using the lateral holes  $\varnothing 3.4$  with M3 screws and nuts

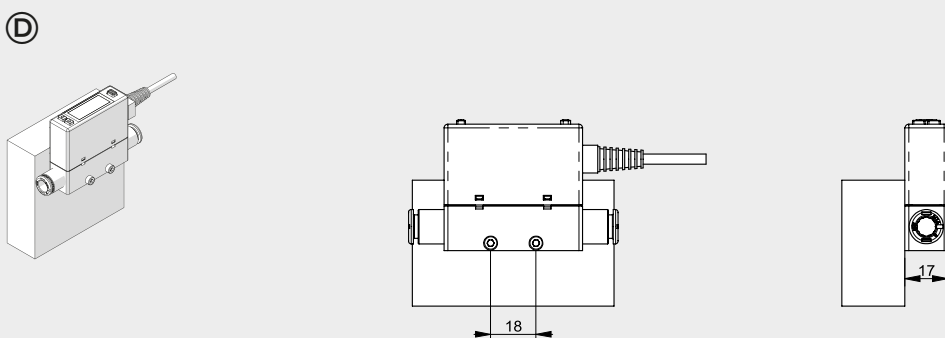

Side fixing using M3 screws, minimum length 23 mm


**DIMENSIONS AND ORDERING CODES**

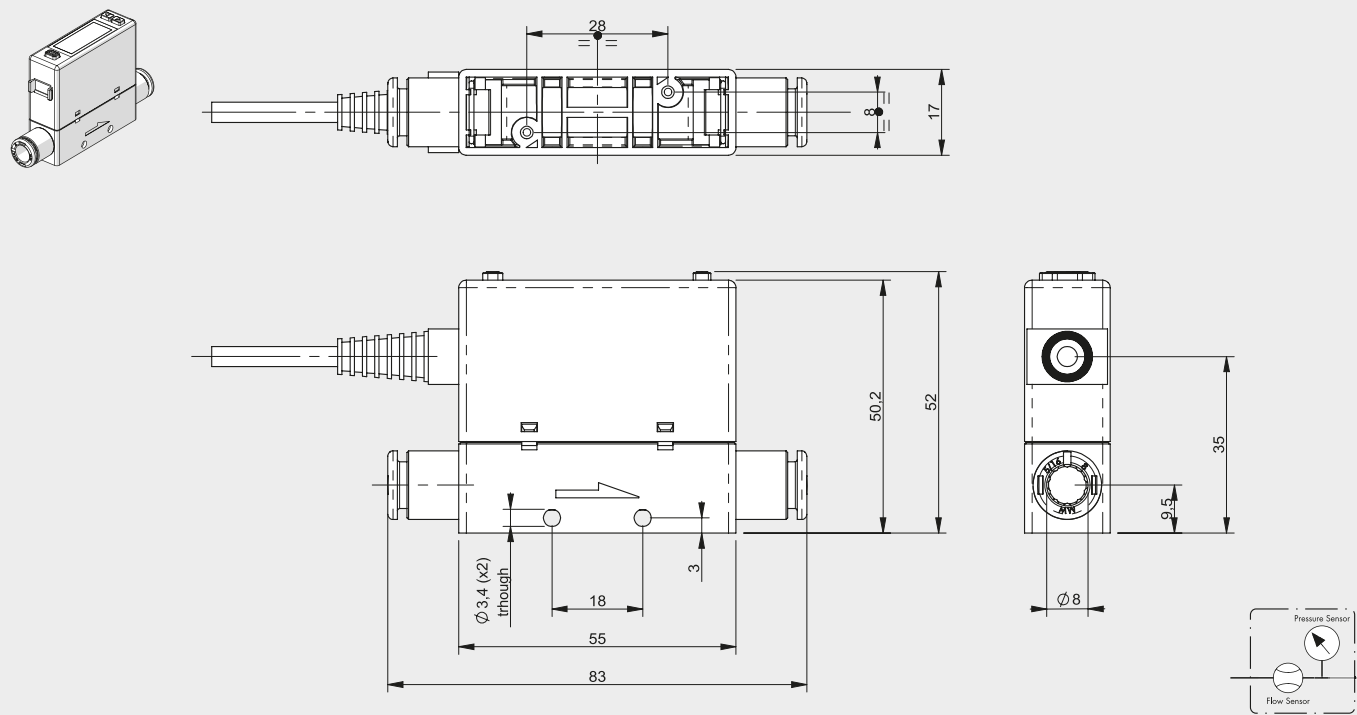

Code	Description
9000958A2	Flowmeter FLUX 0 50L Ø8 PNP 4-20 mA 2 m
9000958V2	Flowmeter FLUX 0 50L Ø8 PNP 1-5V 2 m
9000978A2	Flowmeter FLUX 0 200L Ø8 PNP 4-20 mA 2 m
9000978V2	Flowmeter FLUX 0 200L Ø8 PNP 1-5V 2 m

**ACCESSORIES**


**FIXING BRACKET**



Code	Description
90009A001	Fixing bracket FLUX 0

Note: Comes complete with two 3x6 screws for plastic (max. torque 0,5 Nm)

**CONNECTION BRACKETS ON BAR OMEGA (DIN EN 50022)**



Code	Description
90009A002	Connection brackets on DIN bar FLUX 0

Note: Comes complete with two 3x10 screws for plastic (max. torque 0,5 Nm)